

Mini Plant Wall Instructions for Use




Instructions for Use



After sales instructions

NOTICE: Read the Instructions carefully before use.

In order to cater to the preferences of the vast number of consumers for the plant wall, the company has independently developed several mini plant walls, which have the advantages of self-contained water tanks and can be set at different intervals according to the environment. It is easy to operate, saves time and effort, and is safe and reliable.

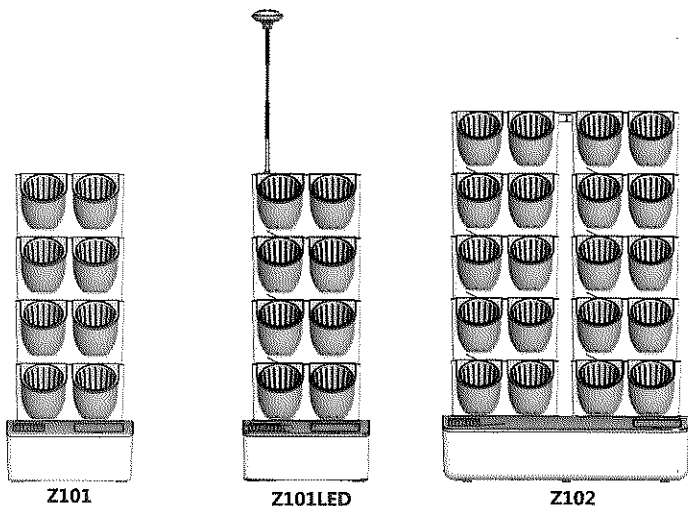


Please read this manual carefully before use for operators!


Parameter	Water tank volume	Lithium battery	LED growth lamp	Planting position	Accessories	Packing specifications
Specification						
Z101	≥4L	Equipped	No	8	Accessories package	29.2*27*67.5cm
Z101LED	≥4L	No	Equipped	8	Accessories package	29.2*27*72.5cm
Z102	≥8L	No	No	20	Accessories package, Mobile support (optional)	58*30.8*64.5cm

I. Structure and Principle

The mini plant wall is composed of the water storage tank, a wall-mounted flower pot, a fixed rod, a USB charging cable, etc. The water tank is equipped with a micro submersible pump, a circuit board, a polymer lithium battery, and a high and low water level monitoring component, which can be adjusted according to the planting environment. Time and other functions.

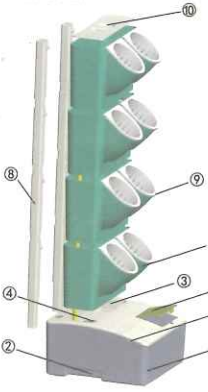

1. Water storage tank
2. The hold position
3. Wall-mounted flower pot groove
4. Filter net
5. Water inlet
6. USB charging slot
7. Wall-mounted flower pot
8. Fixed rod
9. Planting basket
10. Flower pot cover

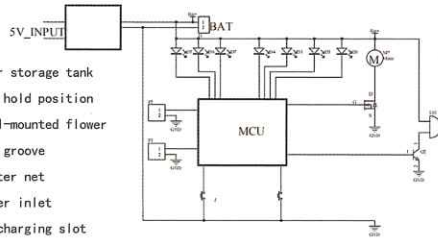

Circuit diagram

(using the picture of Z101 for illustration only)

II. Performance Characteristics:

1. The operation is simple and convenient;

- ① Select different interval time to irrigate or fill light by touching the interval item on the control panel;
- ② When the water level is too high or too low, it will automatically alarm, so there is no need to pay special attention to the water level;
- ③ Add water directly through the water inlet, no need to remove the flower pot, saving time and effort.

2. The water tank has a large capacity;

- ① Equip with a large-capacity water storage tank, adding water at one time can meet the growing needs of plants for a longer period of time.

3. Safe and reliable.

- ① When the water level in the water tank is too low, the built-in alarm will give an alarm intermittently for 60s and the low water level indicator light will be on at the same time the pump will stop working.
- ② When the water level in the water tank is too high, the alarm will sound for 10s and the high water level indicator light will light up.

III. Main Purpose

This series of products is mainly used for planting ornamental plants, it can assemble and plants a variety of plants, which is more ornamental.

IV. Operation and Use

1. Remove the heat shrink film in the product surface after removing the whole flower pot from the package;
2. Place the whole flower pot in the proper position (Note: When moving the mini plant wall, you must hold the hand position on the water tank by hand, and avoid directly moving the wall-mounted flower pot above)
3. Remove the planting basket from the wall-mounted flower pot above the water tank and put the cotton rope on;
4. After planting the favorite plants in the planting basket, check and ensure that there is no residual soil at the bottom of the planting basket and put it back into the wall-mounted flower pot;
5. Fill the water tank with water after checking if the water tank is clean;
6. Touch the interval item on the control panel to select the appropriate interval time;
7. The following is additional instructions for different models:

Specifications	Illustrations
Z101	<ol style="list-style-type: none">1: It can be used normally after charging for 5 hours for the first time.2: Press and hold the power-on button for 2 seconds, and touch the interval button to set the interval watering time.3: The lithium battery contained in this product is mainly used for standby and power failure protection. It is recommended to plug in the charging cable for long-term use.4: Due to the protection circuit inside the product, when the power is insufficient, it will stop automatically and the charging indicator light will flash, so it needs to be charged in time.5: The charging indicator light lights up red when charging, and lights up green when it is full.6: In order to avoid poor charging contact, do not shake when plug the USB charging cable into the charging socket or pull it out in order to avoid damage.7: It is recommended to charge the battery for every 5 months when not in use for a long time.
Z101LED	<ol style="list-style-type: none">1: Plug in the power cord, the power prompt light lights up red, the green lights up after clicking the power-on button to turn on.2: Click the interval button to set the interval watering time.3: Click the fill light button to set the auto fill light time. After setting it, it will automatically fill the light every day.4: Please use genuine power adapter to ensure that the output voltage is 5v current is 1A-2A5: In order to avoid poor contact of the power plug, do not shake after the USB power cord is inserted.

Z102	<p>1: Plug in the power cord, the power prompt light lights up red, the green lights up after clicking the power-on button to turn on.</p> <p>2: Click the interval button to set the interval watering time.</p> <p>3: Please use genuine power adapter to ensure that the output voltage is 5V current is 500MAh-2Ah.</p> <p>4: In order to avoid poor contact of the power plug, do not shake after the USB power cord is inserted.</p> <p>5: The mobile bracket of this plant wall is optional. If you need, you can contact our salesman.</p>
------	--

V. Maintenance and Repair

1. Do not pour sand into the water tank during use, keep the water tank clean;
2. When placing the planted planting basket back into the wall-mounted flower pot, it must be noted whether the bottom of the basket has residual soil;
3. If the wall-mounted flower pot is overflowing with water when pumping after use for a long time, the wall-mounted flower pot can be removed and the filter can be cleaned.

VI. Notice

1. It is strictly prohibited to dismantle and modify it privately.
2. Determine that the output voltage of the charging adapter is DC 4~5V, and its current is 1A~2.0A;
3. Add water until the alarm sounds "Di" for a long time and stop adding water immediately;
4. Do not work for a long time when the water tank is not water or the water level is too low;
5. It is strictly forbidden to approach the heat source or naked light;
6. Keep the water tank clean when using it;



